

# dnp New Wide Angle Screen™



tint which enhances the contrast and colour depth of the image. The screen produces an optimum viewing area which is very wide horizontally and relatively narrow vertically.


- = Improved Wide Angle lens technology
- = Enhanced resolution
- = 180° horizontal viewing angle
- = High image brightness
- = Multiple options for focal length
- = Compatible with LCD, DLP, Light Valve, LCOS and D-ILA projectors

The dnp New Wide Angle Screens (NWA) are a unique range of screens within the dnp Wide Angle Screen family – the world's best selling optical rearpro screens for professional installations. The NWA Screen can be used in practically every rearpro application you can think of – plus a few others!


The NWA Screen offers true 180° horizontal viewing angles, high contrast and ultra-fine resolution and has a special dark tint, which enhances the contrast.

The NWA Screen is especially designed for single lens projectors (LCD, DLP etc.), which are very bright but many of which have relatively poor contrast. The NWA Screen has been optimized for these projectors to give excellent black levels, good contrast and colour saturation.

The NWA Screen is an optical single element system with 2 active lens surfaces. The screen features a special dark

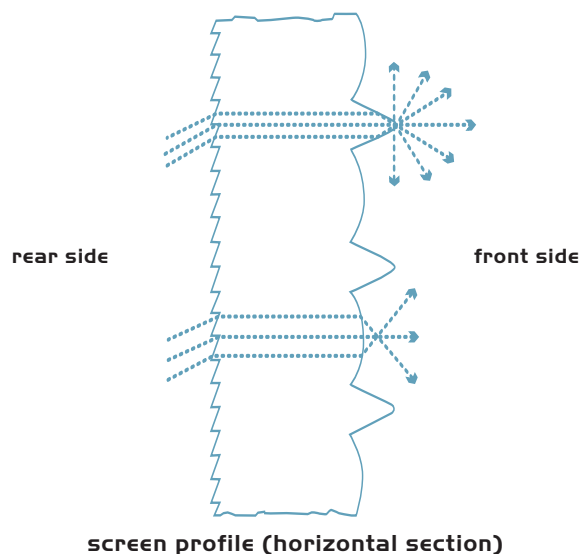

The high precision Fresnel lens on the projector side redirects the projected light and sends it forwards at right-angles to the screen. The diffusion material in the acrylic screen controls the vertical light distribution. The fine pitch lenticular lenses on the front side of the screen distribute the image through a 180° horizontal viewing area.



## Rear projection

Rear projection means that the projector is placed behind the screen, shining straight forward towards the audience. The optical screen controls the light path and distributes bright, sharp images into a predefined viewing zone. Furthermore, the presenter and the audience can stand in front of the image without casting shadows. And with the projector equipment hidden behind the screen, the viewing area remains quiet, clean and tidy.

# Screen specifications

New Wide Angle Screen	Type no.	84° NWA 1900 HC 3 084   190   10	84° NWA 2300 HC 3 084   230   10	100° NWA 1850 HC 3 100   190   10	100° NWA 2300 HC 3 100   230   10	100° NWA 2700 HC 3 100   270   10	120° NWA 1850 HC 3 120   190   10	120° NWA 2300 HC 3 120   230   10
<b>Dimensions</b>								
Width	mm	1742 +/- 1	1742 +/- 1	2066 +/- 1.5	2066 +/- 1.5	2066 +/- 1.5	2472 +/- 1.5	2472 +/- 1.5
Height	mm	1317 +/- 1	1317 +/- 1	1560 +/- 1.5	1560 +/- 1.5	1560 +/- 1.5	1864 +/- 1.5	1864 +/- 1.5
Rec. lens throw ratio range		0.9 - 1.6:1	1.1 - 1.9:1	0.9 - 1.3:1	0.9 - 1.6:1	1.1 - 1.9:1	0.9 - 1.1:1	0.9 - 1.3:1
Rec. projection distance range*	mm	1540 - 2730	1880 - 3240	1830 - 2640	1830 - 3250	2240 - 3860	2190 - 2680	2190 - 3170
Thickness	mm	5.5 +/- 1	5.5 +/- 1	5.5 +/- 1	5.5 +/- 1	5.5 +/- 1	5.5 +/- 1	5.5 +/- 1
Weight	kg	15 +/- 10%	15 +/- 10%	21.7 +/- 10%	21.7 +/- 10%	21.7 +/- 10%	30.9 +/- 10%	30.9 +/- 10%
<b>Image area</b>								
Width	mm	1707	1707	2032	2032	2032	2438	2438
Height	mm	1280	1280	1524	1524	1524	1828	1828
<b>Optical specifications</b>								
Screen focal	mm	1900	2300	1850	2300	2700	1850	2300
New Wide Angle Screen	Type no.	120° NWA 2700 HC 3 120   270   10	120° NWA 3200 HC 3 120   320   10	130° NWA 3200 HC 3 130   320   10				
<b>Dimensions</b>								
Width	mm	2472 +/- 1.5	2472 +/- 1.5	2675 +/- 1.5				
Height	mm	1864 +/- 1.5	1864 +/- 1.5	2016 +/- 1.5				
Rec. lens throw ratio range		0.9 - 1.6:1	1.1 - 1.9:1	1.0 - 1.7:1				
Rec. projection distance range*	mm	2190 - 3900	2680 - 4630	2640 - 4490				
Thickness	mm	5.5 +/- 1	5.5 +/- 1	5.5 +/- 1				
Weight	kg	30.9 +/- 10%	30.9 +/- 10%	36.1 +/- 10%				
<b>Image area</b>								
Width	mm	2438	2438	2642				
Height	mm	1828	1828	1981				
<b>Optical specifications</b>								
Screen focal	mm	2700	3200	3200				


\* General tolerance = -20/+40%, related to the actual screen focal length

# General specifications

Optical specifications	Peak Gain	Pitch	
<b>New Wide Angle Screen</b>	<b>3.5 +/- 0.5</b>	<b>0.25</b>	

Subject to change without notice. Please check specification at time of ordering. Detailed gain curves can be viewed and downloaded at [www.dnp.dk](http://www.dnp.dk)

July 2006



## Optical screen technology

dnp optical screens enhance the image for optimum viewing by combining the focusing ability of a Fresnel lens with the distributive properties of a lenticular lens. The result is brilliantly sharp images, superb contrast and up to 4 times brighter images than conventional front or rear projection screens.

[www.dnp.dk](http://www.dnp.dk)

dnp denmark as · Skruengangen 2 · DK - 2690 Karlslunde · Denmark · Tel: +45 46 16 51 00



Screens of the art