

SONY

Captivate your audience

42" Plasma Public Display



SONY

FWD-42PX2 Overview

- Ideal for digital signage, the FWD-42PX2 is an eye catching 42" plasma display that uses new PDP panel technology for top level brightness and contrast. Pre-fitted BKM-FW10 video input card and DVI.
- Great picture quality - low-reflection screen coating combines with high brightness (1200cd/m²) and high contrast (10000:1) to deliver bright, clear images.
- Integrated High-Performance scan converter - for smooth playback of video signals (up to HD format) and PC (up to UXGA resolution).
- Screen burn protection - screen saver, picture orbiting, selectable dimmer and picture inversion help prevent burn-in.
- Remote management - via RS232C and Control-S control ports.
- Flexible installation options - bottom connector panel, optional table stand and wall mount brackets.




SILVER



Model name	FWD-42PX2
Panel	
Panel size	42"
Maximum resolution	1024x768
Luminance	1200 cd/m ²
Contrast (dark room)	10000:1*1
Viewing angle (H/V)	Free
Pixel size (HxV)	0.9x0.676mm
Colours (millions)	1070
Display area (HxV)	920x518mm
Panel life (hours)	~60000*2
Input connectors	
PC	HD15/DVI-HDCP
Video	BKM-FW10 Composite/S-Video
Audio	Stereo mini x2, RCA
Control	RS232C/Control-S
Output connectors	
PC	-
Video	BKM-FW10 Composite/S-Video
Speaker L/R	•
Audio	Stereo mini
Control	Control-S
PC input	
Frequency (H/V)	15-96kHz/48-85Hz
Video signal	
Video signal	NTSC/PAL/SECAM/NTSC4.43/PAL-M/ PAL60/PAL-N
Audio output	
Audio output	2x7W/6 Ohm
Power requirements	
Requirements	AC100-240V, 50/60Hz
Power consumption	350W (max)
Dimensions (WxHxD)	
Plasma display (mm/inch)	1033x631x121/40.6x24.8x4.75
Shipping (mm/inch)	1170x775x382/46x30.5x15
Weight	
Plasma display (kg/lbs)	30/65.7
Shipping (kg/lbs)	38/84.3
Optional slots	
Optional slots	2
Burn-in prevention	
Picture inversion	•
Picture orbit	•
Picture All White	•
Gray background	•
Auto dimmer	•
PIP/PAP	
PIP/PAP	•/•
Multi-display setup	
Multi-display setup	•
Supplied accessories	
Remote control	•
Power cable	•
Instruction manual	•
DVI cable	•
Installation CD-ROM	-
Component video HD15/ RCA cable	•
RCA/BNC adaptor	•
Optional accessories	
Input boards	BKM-FW11/BKM-FW12
Network management	BKM-FW32*3/BKM-FW50*4
Speakers	SS-SP42FW
Table stand	SU-42FW
Floor stand	FS-LP1NL
Wall bracket	WB-LP1NL
Ceiling bracket	CB-LP1NL
Warranty (years)	2

*1 "Gray to Gray" spec.
 *2 With motion picture signal.
 *3 BKM-FW32/3 SYU
 *4 BKM-FW50/2 SYU

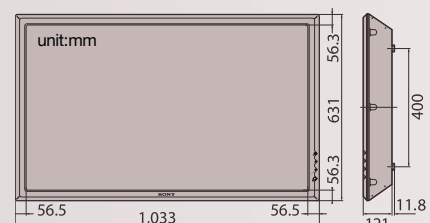

© 2006. Sony and the Sony logo are trademarks of the Sony Corporation, Japan. Features and specifications are subject to change without notice. Some products may not be available in all countries. Sony Corporation is not responsible for any errors which may appear in this document.